

## TECHNICAL DATA SHEET



# EnviroCure Felt

PATENT PENDING

### TEST SPECIFICATIONS

#### ROLL

- **Density and density distribution at various applied pressures.**  
TEST: Compression measured at increasing pressure.  
STANDARD: ASTM D5199
- **Load at break in machine and cross directions.**  
TEST: Tensile testing - Maximum Resistive Force.  
STANDARD: ASTM D5035
- **Secant Modulus in machine and cross directions (resistance to stretch)**  
TEST: Tensile testing - Maximum Resistive Force vs Extension %.  
STANDARD: ASTM D5035
- **Coating adhesion and ability to weld.**  
TEST: Peel strength of welded tape.  
STANDARD: ASTM D903

#### LINER

- **Density, Gauge of liner under various applied pressures.**  
TEST: Compression test of sample of all layers.  
STANDARD: ASTM D1777
- **Felt weld strengths.**  
TEST: Each weld is sampled and destructively tested.  
STANDARD: ASTM D5035
- **Sealing tape weld strengths.**  
TEST: Each weld is sampled and destructively tested.  
STANDARD: ASTM D5035

*Note: Liners are manufactured to internal standard or customer specifications. All liners are tested to the requirements declared above and adhere to the declared ASTM standards. Test data is available upon request.*

### DIMENSION AVAILABILITY

#### Hot Cure Inversion

Diameter: 6 to 84 inch  
Thickness: 3mm to 60mm  
Length: Any

#### Hot Cure Drag-In

Diameter: 6 to 72 inch  
Thickness: 4mm to 60mm  
Length: Up to 300 feet

Coating Weight: 300 to 500gsm (nominal)

Liner Design:

- Liner undersized <10%
- Liner features a welded or stitched seam. Stitched liners only available up to 24in diameter.
- Liner can negotiate pipe bends up to 45°
- General sizing listed above; other custom sizes available.

## Styrene Barrier Coated Felt Liner

### DESCRIPTION

Polyester felt liner with multi-layer coating containing an integrated barrier film conforming to ASTM F1216 and ASTM F1743. To accommodate the requirement for liners of varying thicknesses, multiple layers of polyester felt are employed. United Felts is certified under the current ISO 9001 Quality Standard.

### INSTALLATION METHODS


#### POLYESTER & VE

- Hot cure inversion: Hot water, Steam
- Hot cure drag-in: Hot water, Steam

### ANATOMY OF ENVIROCURE FELT LINER

Features multiple layers of material, which are overlapped to reduce styrene odor and emissions. This multi-layer construction consists of:

1. Inner Felt Layer - With Styrene Barrier Coating
2. Felt Liner Layers - Resin Saturated
3. Pre-Liner - Optional

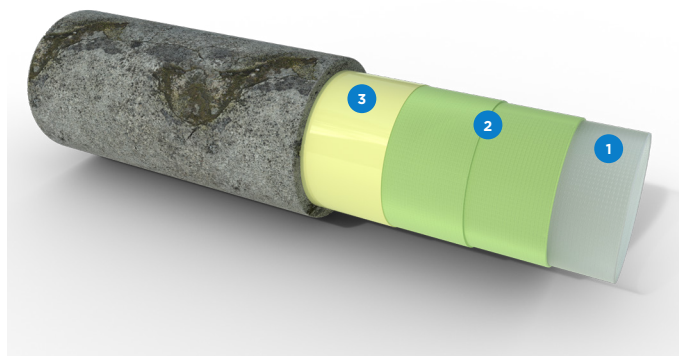

### CURING TEMPERATURE MAX 266°F

DIAMETER (IN)	LINER THICKNESS (MM)	MINIMUM INVERSION PRESSURE (PSI)	MAX COLD INVERSION PRESSURE	IDEAL CURING PRESSURE (PSI)	MAX HOT PRESSURE (PSI)	RESIN AMOUNT (GALLON/FT)	PINCH ROLLER GAP (MM)
4	3	9	13	11	11	0.06	8.2
5	3	6	10	8	9	0.09	8.1
6	3	5	9	7	8	0.10	8.0
6	4.5	8	13	10	11	0.15	11.9
8	3	4	7	5	6	0.14	7.9
8	4.5	6	10	7	9	0.21	11.7
8	6	7	13	10	11	0.27	15.7
8	7.5	9	16	12	14	0.36	19.8
9	4.5	5	9	6	8	0.23	11.7
9	6	7	12	8	10	0.31	15.5
10	4.5	4	8	6	7	0.28	11.6
10	6	6	10	8	9	0.35	15.4
10	7.5	7	13	9	11	0.45	19.4
12	6	4	9	6	8	0.42	15.3
12	7.5	5	11	7	9	0.55	19.2
12	9	7	13	9	11	0.68	23.1
15	7.5	4	9	6	8	0.69	18.9
15	9	5	10	7	9	0.82	22.8
15	10.5	6	12	8	11	0.95	26.8
18	9	4	9	6	8	0.99	22.6
18	10.5	5	10	7	9	1.15	26.4
18	12	6	12	8	10	1.31	30.4
18	13.5	7	13	9	11	1.47	34.4
21	9	4	7	5	7	1.16	22.4
21	10.5	4	9	6	8	1.35	26.2
21	12	5	10	6	9	1.54	30.1
21	13.5	6	11	7	10	1.72	34.0
21	15	6	12	8	11	1.91	38.0
24	9	3	7	4	6	1.33	22.3
24	10.5	4	8	5	7	1.54	26.1
24	12	4	9	6	8	1.76	29.9
24	13.5	5	10	6	9	1.97	33.7
24	15	5	11	7	9	2.19	37.6

1. Suitable only for Applied Felts liners designed for and to be installed by inversion.
2. Roller gap setting is for guidance only. Impregnation equipment differs: Rubber wrappings on rollers, positional hysteresis and flexing of rollers cause roller gap settings to vary between different equipment. Roller gap setting for any given equipment should be reasonably repeatable.
3. We strongly recommend the resin addition be monitored and controlled by adjustment of the roller gap settings, as necessary. Ultimately, it is the correct resin addition which is imperative, not the roller gap.

**RECOMMENDED INVERSION AND HEAD CURING CHART**  
**Heat-Welded Seams**

PIPE DIAMETER (IN)	CIPP TUBE THICKNESS (MM)	IDEAL CURING HEAD		MINIMUM INSTALLATION HEAD		MAXIMUM HOT HEAD		MAXIMUM COLD HEAD	
		(FT)	(PSI)	(FT)	(PSI)	(FT)	(PSI)	(FT)	(PSI)
6	4.5	23.4	10.2	18.0	7.8	26.2	11.4	30.0	13.0
6	5.5	28.6	12.4	21.9	9.5	32.0	13.9	36.7	15.9
6	6	31.2	13.6	23.9	10.4	34.9	15.2	40.0	17.4
8	4.5	16.8	7.3	12.8	5.6	19.7	8.5	22.5	9.8
8	5.5	20.5	8.9	15.7	6.8	24.0	10.4	27.5	11.9
8	6	22.3	9.7	17.1	7.4	26.2	11.4	30.0	13.0
8	7.5	27.9	12.1	21.4	9.3	32.8	14.2	37.5	16.3
10	4.5	13.0	5.7	10.0	4.3	15.7	6.8	18.0	7.8
10	5.5	15.9	6.9	12.2	5.3	19.2	8.3	22.0	9.6
10	6	17.4	7.5	13.3	5.8	21.0	9.1	24.0	10.4
10	7.5	21.7	9.4	16.6	7.2	26.2	11.4	30.0	13.0
10	9	26.1	11.3	20.0	8.7	31.5	13.7	36.0	15.6
12	6	13.1	5.7	10.0	4.3	17.5	7.6	20.0	8.7
12	6.5	14.1	6.1	10.8	4.7	18.9	8.2	21.7	9.4
12	7	15.2	6.6	11.7	5.1	20.4	8.9	23.3	10.1
12	7.5	16.3	7.1	12.5	5.4	21.8	9.5	25.0	10.9
12	9	19.6	8.5	15.0	6.5	26.2	11.4	30.0	13.0
12	10.5	22.8	9.9	17.5	7.6	30.6	13.3	35.0	15.2
15	6	10.4	4.5	8.0	3.5	14.0	6.1	16.0	7.0
15	7.5	13.1	5.7	10.0	4.3	17.5	7.6	20.0	8.7
15	9	15.7	6.8	12.0	5.2	21.0	9.1	24.0	10.4
15	10.5	18.3	7.9	14.0	6.1	24.5	10.6	28.0	12.2
15	12	20.9	9.1	16.0	7.0	28.0	12.1	32.0	13.9
15	13.5	23.5	10.2	18.0	7.8	31.5	13.7	36.0	15.6
18	6	8.7	3.8	6.7	2.9	11.6	5.1	13.3	5.8
18	7.5	10.9	4.7	8.3	3.6	14.6	6.3	16.7	7.2
18	9	13.1	5.7	10.0	4.3	17.5	7.6	20.0	8.7
18	10.5	15.2	6.6	11.7	5.1	20.4	8.9	23.3	10.1
18	12	17.4	7.6	13.3	5.8	23.3	10.1	26.7	11.6
18	13.5	19.6	8.5	15.0	6.5	26.2	11.4	30.0	13.0
18	15	21.8	9.4	16.7	7.2	29.1	12.6	33.3	14.5
21	6	7.5	3.2	5.7	2.5	10.0	4.3	11.4	5.0
21	7.5	9.3	4.0	7.1	3.1	12.5	5.4	14.3	6.2
21	9	11.2	4.9	8.6	3.7	15.0	6.5	17.1	7.4
21	10.5	13.1	5.7	10.0	4.3	17.5	7.6	20.0	8.7
21	12	14.9	6.5	11.4	5.0	20.0	8.7	22.9	9.9
21	13.5	16.8	7.3	12.9	5.6	22.5	9.8	25.7	11.2
21	15	18.7	8.1	14.3	6.2	25.0	10.8	28.6	12.4
21	16.5	20.5	8.9	15.7	6.8	27.5	11.9	31.4	13.6
21	18	22.4	9.7	17.1	7.4	30.0	13.0	34.3	14.9
21	19.5	24.2	10.5	18.6	8.1	32.5	14.1	37.2	16.1

## RECOMMENDED INVERSION AND HEAD CURING CHART

### Heat-Welded Seams

PIPE DIAMETER (IN)	CIPP TUBE THICKNESS (MM)	IDEAL CURING HEAD		MINIMUM INSTALLATION HEAD		MAXIMUM HOT HEAD		MAXIMUM COLD HEAD	
		(FT)	(PSI)	(FT)	(PSI)	(FT)	(PSI)	(FT)	(PSI)
24	7.5	8.2	3.5	6.3	2.7	10.9	4.7	12.5	5.4
24	9	9.8	4.3	7.5	3.3	13.1	5.7	15.0	6.5
24	10.5	11.4	5.0	8.8	3.8	15.3	6.6	17.5	7.6
24	12	13.1	5.7	10.0	4.3	17.5	7.6	20.0	8.7
24	13.5	14.7	6.4	11.3	4.9	19.7	8.5	22.5	9.8
24	15	16.3	7.1	12.5	5.4	21.8	9.5	25.0	10.9
24	16.5	18.0	7.8	13.8	6.0	24.0	10.4	27.5	11.9
24	18	19.6	8.5	15.0	6.5	26.2	11.4	30.0	13.0
24	19.5	21.2	9.2	16.3	7.1	28.4	12.3	32.5	14.1
24	21	22.8	9.9	17.5	7.6	30.6	13.3	35.0	15.2
24	22.5	24.5	10.6	18.8	8.1	32.8	14.2	37.5	16.3
27	7.5	7.3	3.1	5.6	2.4	9.7	4.2	11.1	4.8
27	9	8.7	3.8	6.7	2.9	11.6	5.1	13.3	5.8
27	10.5	10.2	4.4	7.8	3.4	13.6	5.9	15.6	6.8
27	12	11.6	5.0	8.9	3.9	15.5	6.7	17.8	7.7
27	13.5	13.1	5.7	10.0	4.3	17.5	7.6	20.0	8.7
27	15	14.5	6.3	11.1	4.8	19.4	8.4	22.2	9.6
27	16.5	16.0	6.9	12.2	5.3	21.4	9.3	24.5	10.6
27	19	18.4	8.0	14.1	6.1	24.6	10.7	28.2	12.2
27	19.5	18.9	8.2	14.5	6.3	25.2	11.0	28.9	12.5
27	21	20.3	8.8	15.6	6.8	27.2	11.8	31.1	13.5
27	22.5	21.8	9.4	16.7	7.2	29.1	12.6	33.3	14.5
27	24	23.2	10.1	17.8	7.7	31.1	13.5	35.6	15.4
30	7.5	6.5	2.8	5.0	2.2	8.7	3.8	10.0	4.3
30	9	7.8	3.4	6.0	2.6	10.5	4.6	12.0	5.2
30	10.5	9.1	4.0	7.0	3.0	12.2	5.3	14.0	6.1
30	12	10.4	4.5	8.0	3.5	14.0	6.1	16.0	6.9
30	13.5	11.8	5.1	9.0	3.9	15.7	6.8	18.0	7.8
30	15	13.1	5.7	10.0	4.3	17.5	7.6	20.0	8.7
30	16.5	14.4	6.2	11.0	4.8	19.2	8.3	22.0	9.6
30	18	15.7	6.8	12.0	5.2	21.0	9.1	24.0	10.4
30	19.5	17.0	7.4	13.0	5.6	22.7	9.9	26.0	11.3
30	21	18.3	7.9	14.0	6.1	24.5	10.6	28.0	12.2
30	22.5	19.6	8.5	15.0	6.5	26.2	11.4	30.0	13.0
30	24	20.9	9.1	16.0	6.9	28.0	12.1	32.0	13.9
30	27	23.5	10.2	18.0	7.8	31.5	13.7	36.0	15.6

**RECOMMENDED INVERSION AND HEAD CURING CHART**  
**Heat-Welded Seams**

PIPE DIAMETER (IN)	CIPP TUBE THICKNESS (MM)	IDEAL CURING HEAD		MINIMUM INSTALLATION HEAD		MAXIMUM HOT HEAD		MAXIMUM COLD HEAD	
		(FT)	(PSI)	(FT)	(PSI)	(FT)	(PSI)	(FT)	(PSI)
36	10.5	7.6	3.3	5.8	2.5	10.2	4.4	11.7	5.1
36	12	8.7	3.8	6.7	2.9	11.6	5.1	13.3	5.8
36	13.5	9.8	4.3	7.5	3.3	13.1	5.7	15.0	6.5
36	15	10.9	4.7	8.3	3.6	14.6	6.3	16.7	7.2
36	16.5	12.0	5.2	9.2	4.0	16.0	7.0	18.3	8.0
36	18	13.1	5.7	10.0	4.3	17.5	7.6	20.0	8.7
36	19.5	14.1	6.1	10.8	4.7	18.9	8.2	21.7	9.4
36	21	15.2	6.6	11.7	5.1	20.4	8.8	23.3	10.1
36	22.5	16.3	7.1	12.5	5.4	21.8	9.5	25.0	10.9
36	24	17.4	7.6	13.3	5.8	23.3	10.1	26.7	11.6
36	27	19.6	8.5	15.0	6.5	26.2	11.4	30.0	13.0
42	13.5	8.4	3.6	6.4	2.8	11.2	4.9	12.9	5.6
42	15	9.3	4.0	7.1	3.1	12.5	5.4	14.3	6.2
42	16.5	10.3	4.5	7.9	3.4	13.7	6.0	15.7	6.8
42	18	11.2	4.9	8.6	3.7	15.0	6.5	17.1	7.4
42	19.5	12.1	5.3	9.3	4.0	16.2	7.0	18.6	8.1
42	21	13.1	5.7	10.0	4.3	17.5	7.6	20.0	8.7
42	22.5	14.0	6.1	10.7	4.7	18.7	8.1	21.4	9.3
42	24	14.9	6.5	11.4	5.0	20.0	8.7	22.9	9.9
42	27	16.8	7.3	12.9	5.6	22.5	9.8	25.7	11.2
42	28.5	17.7	7.7	13.6	5.9	23.7	10.3	27.2	11.8
48	13.5	7.3	3.2	5.6	2.4	9.8	4.3	11.3	4.9
48	15	8.2	3.5	6.3	2.7	10.9	4.7	12.5	5.4
48	16.5	9.0	3.9	6.9	3.0	12.0	5.2	13.8	6.0
48	18	9.8	4.3	7.5	3.3	13.1	5.7	15.0	6.5
48	19.5	10.6	4.6	8.1	3.5	14.2	6.2	16.3	7.1
48	21	11.4	5.0	8.8	3.8	15.3	6.6	17.5	7.6
48	22.5	12.2	5.3	9.4	4.1	16.4	7.1	18.8	8.1
48	24	13.1	5.7	10.0	4.3	17.5	7.6	20.0	8.7
48	27	14.7	6.4	11.3	4.9	19.7	8.5	22.5	9.8
48	28.5	15.5	6.7	11.9	5.2	20.8	9.0	23.8	10.3
48	30	16.3	7.1	12.5	5.4	21.8	9.5	25.0	10.9
48	33	18.0	7.8	13.8	6.0	24.0	10.4	27.5	11.9
48	36	19.6	8.5	15.0	6.5	26.2	11.4	30.0	13.0
48	42	22.8	9.9	17.5	7.6	30.6	13.3	35.0	15.2

**RECOMMENDED INVERSION AND HEAD CURING CHART**  
**Heat-Welded Seams**

PIPE DIAMETER (IN)	CIPP TUBE THICKNESS (MM)	IDEAL CURING HEAD		MINIMUM INSTALLATION HEAD		MAXIMUM HOT HEAD		MAXIMUM COLD HEAD	
		(FT)	(PSI)	(FT)	(PSI)	(FT)	(PSI)	(FT)	(PSI)
54	15	7.3	3.1	5.6	2.4	9.7	4.2	11.1	4.8
54	16.5	8.0	3.5	6.1	2.7	10.7	4.6	12.2	5.3
54	18	8.7	3.8	6.7	2.9	11.6	5.1	13.3	5.8
54	19.5	9.4	4.1	7.2	3.1	12.6	5.5	14.5	6.3
54	21	10.2	4.4	7.8	3.4	13.6	5.9	15.6	6.8
54	22.5	10.9	4.7	8.3	3.6	14.6	6.3	16.7	7.2
54	24	11.6	5.0	8.9	3.9	15.5	6.7	17.8	7.7
54	27	13.1	5.7	10.0	4.3	17.5	7.6	20.0	8.7
54	28.5	13.8	6.0	10.6	4.6	18.4	8.0	21.1	9.2
54	30	14.5	6.3	11.1	4.8	19.4	8.4	22.2	9.6
54	33	16.0	6.9	12.2	5.3	21.4	9.3	24.5	10.6
54	36	17.4	7.6	13.3	5.8	23.3	10.1	26.7	11.6
54	42	20.3	8.8	15.6	6.8	27.2	11.8	31.1	13.5
54	48	23.2	10.1	17.8	7.7	31.1	13.5	35.6	15.4
54	54	26.1	11.3	20.0	8.7	34.9	15.2	40.0	17.4
54	60	29.0	12.6	22.2	9.6	38.8	16.9	44.5	19.3
60	18	7.8	3.4	6.0	2.6	10.5	4.6	12.0	5.2
60	19.5	8.5	3.7	6.5	2.8	11.4	4.9	13.0	5.6
60	21	9.1	4.0	7.0	3.0	12.2	5.3	14.0	6.1
60	22.5	9.8	4.3	7.5	3.3	13.1	5.7	15.0	6.5
60	24	10.4	4.5	8.0	3.5	14.0	6.1	16.0	6.9
60	27	11.8	5.1	9.0	3.9	15.7	6.8	18.0	7.8
60	28.5	12.4	5.4	9.5	4.1	16.6	7.2	19.0	8.2
60	30	13.1	5.7	10.0	4.3	17.5	7.6	20.0	8.7
60	33	14.4	6.2	11.0	4.8	19.2	8.3	22.0	9.6
60	36	15.7	6.8	12.0	5.2	21.0	9.1	24.0	10.4
60	42	18.3	7.9	14.0	6.1	24.5	10.6	28.0	12.2
60	48	20.9	9.1	16.0	6.9	28.0	12.1	32.0	13.9
60	54	23.5	10.2	18.0	7.8	31.5	13.7	36.0	15.6
60	60	26.1	11.3	20.0	8.7	34.9	15.2	40.0	17.4

**RECOMMENDED INVERSION AND HEAD CURING CHART**  
**Heat-Welded Seams**

PIPE DIAMETER (IN)	CIPP TUBE THICKNESS (MM)	IDEAL CURING HEAD		MINIMUM INSTALLATION HEAD		MAXIMUM HOT HEAD		MAXIMUM COLD HEAD	
		(FT)	(PSI)	(FT)	(PSI)	(FT)	(PSI)	(FT)	(PSI)
63	18	7.5	3.2	5.7	2.5	10.0	4.3	11.4	5.0
63	19.5	8.1	3.5	6.2	2.7	10.8	4.7	12.4	5.4
63	21	8.7	3.8	6.7	2.9	11.6	5.1	13.3	5.8
63	22.5	9.3	4.0	7.1	3.1	12.5	5.4	14.3	6.2
63	24	9.9	4.3	7.6	3.3	13.3	5.8	15.2	6.6
63	27	11.2	4.9	8.6	3.7	15.0	6.5	17.1	7.4
63	28.5	11.8	5.1	9.1	3.9	15.8	6.9	18.1	7.9
63	30	12.4	5.4	9.5	4.1	16.6	7.2	19.1	8.3
63	33	13.7	5.9	10.5	4.5	18.3	7.9	21.0	9.1
63	36	14.9	6.5	11.4	5.0	20.0	8.7	22.9	9.9
63	42	17.4	7.6	13.3	5.8	23.3	10.1	26.7	11.6
63	48	19.9	8.6	15.2	6.6	26.6	11.6	30.5	13.2
63	54	22.4	9.7	17.1	7.4	30.0	13.0	34.3	14.9
63	60	24.9	10.8	19.1	8.3	33.3	14.4	38.1	16.5
69	18	6.8	3.0	5.2	2.3	9.1	4.0	10.4	4.5
69	19.5	7.4	3.2	5.7	2.5	9.9	4.3	11.3	4.9
69	21	7.9	3.4	6.1	2.6	10.6	4.6	12.2	5.3
69	22.5	8.5	3.7	6.5	2.8	11.4	4.9	13.0	5.7
69	24	9.1	3.9	7.0	3.0	12.2	5.3	13.9	6.0
69	27	10.2	4.4	7.8	3.4	13.7	5.9	15.7	6.8
69	30	11.4	4.9	8.7	3.8	15.2	6.6	17.4	7.6
69	33	12.5	5.4	9.6	4.2	16.7	7.3	19.1	8.3
69	36	13.6	5.9	10.4	4.5	18.2	7.9	20.9	9.1
69	42	15.9	6.9	12.2	5.3	21.3	9.2	24.4	10.6
69	48	18.2	7.9	13.9	6.0	24.3	10.6	27.8	12.1
69	54	20.4	8.9	15.7	6.8	27.4	11.9	31.3	13.6
69	57	21.6	9.4	16.5	7.2	28.9	12.5	33.1	14.3
69	61	23.1	10.0	17.7	7.7	30.9	13.4	35.4	15.4
69	63	23.8	10.3	18.3	7.9	31.9	13.8	36.5	15.9

**RECOMMENDED INVERSION AND HEAD CURING CHART**  
**Heat-Welded Seams**

PIPE DIAMETER (IN)	CIPP TUBE THICKNESS (MM)	IDEAL CURING HEAD		MINIMUM INSTALLATION HEAD		MAXIMUM HOT HEAD		MAXIMUM COLD HEAD	
		(FT)	(PSI)	(FT)	(PSI)	(FT)	(PSI)	(FT)	(PSI)
72	19.5	7.1	3.1	5.4	2.4	9.5	4.1	10.8	4.7
72	21	7.6	3.3	5.8	2.5	10.2	4.4	11.7	5.1
72	22.5	8.2	3.5	6.3	2.7	10.9	4.7	12.5	5.4
72	24	8.7	3.8	6.7	2.9	11.6	5.1	13.3	5.8
72	27	9.8	4.3	7.5	3.3	13.1	5.7	15.0	6.5
72	28.5	10.3	4.5	7.9	3.4	13.8	6.0	15.8	6.9
72	30	10.9	4.7	8.3	3.6	14.6	6.3	16.7	7.2
72	33	12.0	5.2	9.2	4.0	16.0	7.0	18.3	8.0
72	36	13.1	5.7	10.0	4.3	17.5	7.6	20.0	8.7
72	42	15.2	6.6	11.7	5.1	20.4	8.8	23.3	10.1
72	48	17.4	7.6	13.3	5.8	23.3	10.1	26.7	11.6
72	54	19.6	8.5	15.0	6.5	26.2	11.4	30.0	13.0
72	57	20.7	9.0	15.8	6.9	27.7	12.0	31.7	13.7
72	61	22.1	9.6	17.0	7.4	29.6	12.9	33.9	14.7
72	63	22.8	9.9	17.5	7.6	30.6	13.3	35.0	15.2
78	21	7.0	3.1	5.4	2.3	9.4	4.1	10.8	4.7
78	22.5	7.5	3.3	5.8	2.5	10.1	4.4	11.5	5.0
78	24	8.0	3.5	6.2	2.7	10.8	4.7	12.3	5.3
78	27	9.0	3.9	6.9	3.0	12.1	5.3	13.9	6.0
78	28.5	9.5	4.1	7.3	3.2	12.8	5.5	14.6	6.3
78	30	10.0	4.4	7.7	3.3	13.4	5.8	15.4	6.7
78	33	11.0	4.8	8.5	3.7	14.8	6.4	16.9	7.3
78	36	12.1	5.2	9.2	4.0	16.1	7.0	18.5	8.0
78	42	14.1	6.1	10.8	4.7	18.8	8.2	21.5	9.4
78	48	16.1	7.0	12.3	5.3	21.5	9.3	24.6	10.7
78	54	18.1	7.8	13.9	6.0	24.2	10.5	27.7	12.0
78	57	19.1	8.3	14.6	6.3	25.5	11.1	29.2	12.7
78	61	20.4	8.9	15.6	6.8	27.3	11.9	31.3	13.6
78	63	21.1	9.2	16.2	7.0	28.2	12.3	32.3	14.0



## RECOMMENDED INVERSION AND HEAD CURING CHART Heat-Welded Seams

PIPE DIAMETER (IN)	CIPP TUBE THICKNESS (MM)	IDEAL CURING HEAD		MINIMUM INSTALLATION HEAD		MAXIMUM HOT HEAD		MAXIMUM COLD HEAD	
		(FT)	(PSI)	(FT)	(PSI)	(FT)	(PSI)	(FT)	(PSI)
84	21	6.5	2.8	5.0	2.2	8.7	3.8	10.0	4.3
84	22.5	7.0	3.0	5.4	2.3	9.4	4.1	10.7	4.7
84	24	7.5	3.2	5.7	2.5	10.0	4.3	11.4	5.0
84	27	8.4	3.6	6.4	2.8	11.2	4.9	12.9	5.6
84	28.5	8.9	3.8	6.8	2.9	11.9	5.1	13.6	5.9
84	30	9.3	4.0	7.1	3.1	12.5	5.4	14.3	6.2
84	33	10.3	4.5	7.9	3.4	13.7	6.0	15.7	6.8
84	36	11.2	4.9	8.6	3.7	15.0	6.5	17.1	7.4
84	42	13.1	5.7	10.0	4.3	17.5	7.6	20.0	8.7
84	48	14.9	6.5	11.4	5.0	20.0	8.7	22.9	9.9
84	54	16.8	7.3	12.9	5.6	22.5	9.8	25.7	11.2
84	57	17.7	7.7	13.6	5.9	23.7	10.3	27.2	11.8
84	61	19.0	8.2	14.5	6.3	25.4	11.0	29.1	12.6
84	63	19.6	8.5	15.0	6.5	26.2	11.4	30.0	13.0
84	65	20.2	8.8	15.5	6.7	27.0	11.7	31.0	13.4

*Warranty Disclaimer: The above chart provides the estimated installation and curing pressures of polyester felt inversion liners. Many factors can affect the outcome of a cured-in-place pipe installation. This table assumes proper installation techniques, type of equipment, and resin impregnation of the tube diameter. It is important to note that these and other factors associated with the installation of cured-in-place pipe will vary greatly between installations; each installation is unique. There is no warranty of merchantability or fitness for any particular purpose. Under no circumstances shall Applied Felts Inc., be liable for incidental, punitive special, indirect or consequential damages or for lost profits or labor costs, and in no event shall damages exceed the purchase price paid for the products.*

## RECOMMENDED INVERSION AND HEAD CURING CHART Stitched Seams

PIPE DIAMETER (IN)	CIPP TUBE THICKNESS (MM)	IDEAL CURING HEAD		MINIMUM INSTALLATION HEAD		MAXIMUM HOT HEAD		MAXIMUM COLD HEAD	
		(FT)	(PSI)	(FT)	(PSI)	(FT)	(PSI)	(FT)	(PSI)
6	4.5	19.5	8.4	15.5	6.7	33.9	14.7	65.4	28.4
6	5.5	23.8	10.3	18.9	8.2	41.4	18.0	79.9	34.7
6	6	26.0	11.3	20.7	9.0	45.2	19.6	87.2	37.8
8	4.5	14.6	6.3	11.6	5.0	25.4	11.0	49.0	21.3
8	5.5	17.8	7.7	14.2	6.2	31.1	13.5	59.9	26.0
8	6	19.5	8.4	15.5	6.7	33.9	14.7	65.4	28.4
8	7.5	24.3	10.6	19.4	8.4	42.4	18.4	81.7	35.5
10	4.5	11.7	5.1	9.3	4.0	20.3	8.8	39.2	17.0
10	5.5	14.3	6.2	11.4	4.9	24.9	10.8	47.9	20.8
10	6	15.6	6.8	12.4	5.4	27.1	11.8	52.3	22.7
10	7.5	19.5	8.4	15.5	6.7	33.9	14.7	65.4	28.4
10	9	23.4	10.1	18.6	8.1	40.7	17.7	78.4	34.0
12	6	13.0	5.6	10.3	4.5	22.6	9.8	43.6	18.9
12	6.5	14.1	6.1	11.2	4.9	24.5	10.6	47.2	20.5
12	7	15.1	6.6	12.1	5.2	26.4	11.4	50.8	22.1
12	7.5	16.2	7.0	12.9	5.6	28.2	12.3	54.5	23.6
12	9	19.5	8.4	15.5	6.7	33.9	14.7	65.4	28.4
12	10.5	22.7	9.9	18.1	7.8	39.5	17.2	76.3	33.1
15	6	10.4	4.5	8.3	3.6	18.1	7.8	34.9	15.1
15	7.5	13.0	5.6	10.3	4.5	22.6	9.8	43.6	18.9
15	9	15.6	6.8	12.4	5.4	27.1	11.8	52.3	22.7
15	10.5	18.2	7.9	14.5	6.3	31.6	13.7	61.0	26.5
15	12	20.8	9.0	16.5	7.2	36.2	15.7	69.7	30.3
15	13.5	23.4	10.1	18.6	8.1	40.7	17.7	78.4	34.0
18	6	8.7	3.8	6.9	3.0	15.1	6.5	29.1	12.6
18	7.5	10.8	4.7	8.6	3.7	18.8	8.2	36.3	15.8
18	9	13.0	5.6	10.3	4.5	22.6	9.8	43.6	18.9
18	10.5	15.1	6.6	12.1	5.2	26.4	11.4	50.8	22.1
18	12	17.3	7.5	13.8	6.0	30.1	13.1	58.1	25.2
18	13.5	19.5	8.4	15.5	6.7	33.9	14.7	65.4	28.4
18	15	21.6	9.4	17.2	7.5	37.7	16.3	72.6	31.5

## RECOMMENDED INVERSION AND HEAD CURING CHART

### Stitched Seams

PIPE DIAMETER (IN)	CIPP TUBE THICKNESS (MM)	IDEAL CURING HEAD		MINIMUM INSTALLATION HEAD		MAXIMUM HOT HEAD		MAXIMUM COLD HEAD	
		(FT)	(PSI)	(FT)	(PSI)	(FT)	(PSI)	(FT)	(PSI)
21	6	7.4	3.2	5.9	2.6	12.9	5.6	24.9	10.8
21	7.5	9.3	4.0	7.4	3.2	16.1	7.0	31.1	13.5
21	9	11.1	4.8	8.9	3.8	19.4	8.4	37.4	16.2
21	10.5	13.0	5.6	10.3	4.5	22.6	9.8	43.6	18.9
21	12	14.8	6.4	11.8	5.1	25.8	11.2	49.8	21.6
21	13.5	16.7	7.2	13.3	5.8	29.1	12.6	56.0	24.3
21	15	18.5	8.0	14.8	6.4	32.3	14.0	62.3	27.0
21	16.5	20.4	8.9	16.2	7.0	35.5	15.4	68.5	29.7
21	18	22.2	9.7	17.7	7.7	38.7	16.8	74.7	32.4
21	19.5	24.1	10.5	19.2	8.3	42.0	18.2	80.9	35.1
24	7.5	8.1	3.5	6.5	2.8	14.1	6.1	27.2	11.8
24	9	9.7	4.2	7.7	3.4	16.9	7.4	32.7	14.2
24	10.5	11.4	4.9	9.0	3.9	19.8	8.6	38.1	16.6
24	12	13.0	5.6	10.3	4.5	22.6	9.8	43.6	18.9
24	13.5	14.6	6.3	11.6	5.0	25.4	11.0	49.0	21.3
24	15	16.2	7.0	12.9	5.6	28.2	12.3	54.5	23.6
24	16.5	17.8	7.7	14.2	6.2	31.1	13.5	59.9	26.0
24	18	19.5	8.4	15.5	6.7	33.9	14.7	65.4	28.4
24	19.5	21.1	9.2	16.8	7.3	36.7	15.9	70.8	30.7
24	21	22.7	9.9	18.1	7.8	39.5	17.2	76.3	33.1
24	22.5	24.3	10.6	19.4	8.4	42.4	18.4	81.7	35.5

*Warranty Disclaimer: The above chart provides the estimated installation and curing pressures of polyester felt inversion liners. Many factors can affect the outcome of a cured-in-place pipe installation. This table assumes proper installation techniques, type of equipment, and resin impregnation of the tube diameter. It is important to note that these and other factors associated with the installation of cured-in-place pipe will vary greatly between installations; each installation is unique. There is no warranty of merchantability or fitness for any particular purpose. Under no circumstances shall United Felts be liable for incidental, punitive special, indirect or consequential damages or for lost profits or labor costs, and in no event shall damages exceed the purchase price paid for the products.*