


UV CIPP LINER COMPARISON

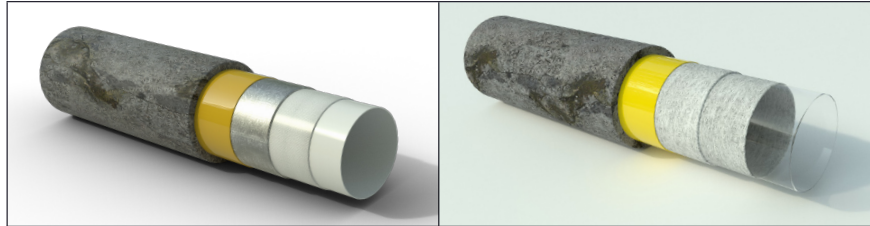

ENVIROCURE UV®
PATENT PENDING

UNITED UV GRP

PRODUCT FEATURES		
Dimples at Lateral	Yes — Allowing for fast easy reinstatement	No
Diameter Range	6"-36"	6"-72"
Typical Applications	Sections multiple laterals	Long, straight sections, minimal lateral connections, larger diameters
ASTM TESTS		
D790 Flex Strength	20,000 psi	35,000 psi
D790 Flex Modulus	1,500,000 psa	2,000,000 psi
D648 Heat Distortion Temp	248°F @ 264 psi	248°F @ 264 psi
MATERIAL SPECS		
Reinforcement Material	Stitched, Multiaxial ECR Glass	Stitched, Multiaxial ECR Glass
Glass Fiber Content Per ISO 1172	50% (+/-5%)	50% (+/-5%)
Glass Weight Per Unit	1112 g/m ² (+/- 10%)	850-900 gsm/m ² (+/- 10%)